
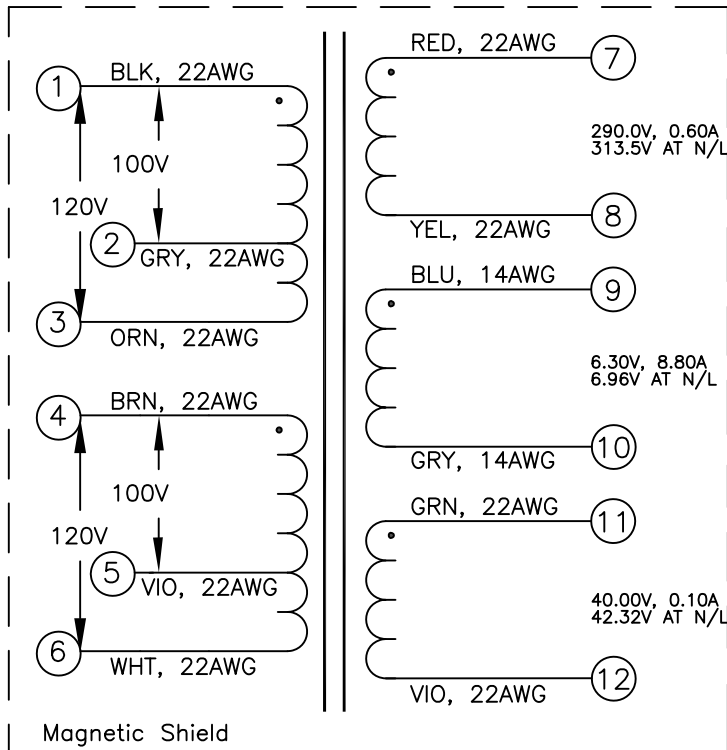


"CONFIDENTIAL"

STANDARD


POWER:	VA	233
TEMPERATURE RISE:	°C	*33
EFFICIENCY:	%	*92
WEIGHT:	kg	*3.19
FREQUENCY:	Hz	50-60

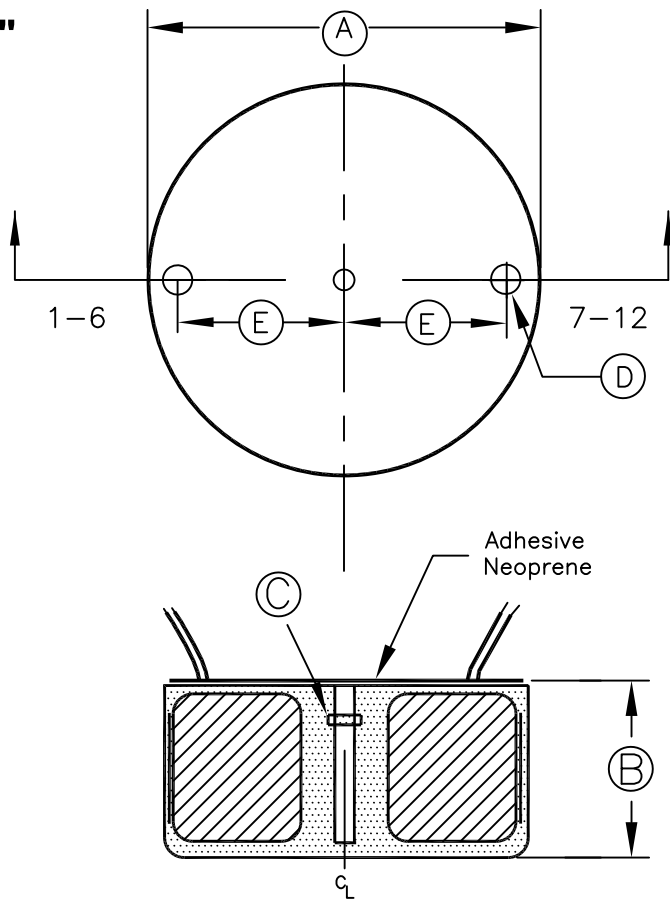


REF	DIMENSIONS			TOLERANCE
	Unit:	(nom)	(max)	
A	mm	152.4		
B	mm	88.90		
C	inch	5/16-18 T-NUT		
D	mm	25 (2 Places)		±5
E	mm	50 (2 Places)		±5

LEADS	LENGTH +/-10mm	TERMINATION +3/-0mm
1-12	200	STRIP 6mm

LABEL

PLITRON MANUFACTURING INC.
 654708-03 DATE CODE F:50/60Hz 
 INPUT:2X(0-100-120VAC)
 OUTPUT:290V@.6A 6.3V@8.8A 40V@.1A
 UL P/N 4708-X0-03

- NOTES:**
- UL recognised under UL File No.E156800 to UL506, UL1411, CSA 22.2 No.66-1988 Class A(105°C) Insulation System.
 - All stranded leads are rated for 105°C, 600V minimum.
 - Transformer is encapsulated in Aluminum can.
 - HIPOT 2/5 to 7/9/11 at 2.5kV for 5 seconds.
HIPOT 7 to 9/11 at 1.5kV for 5 seconds.
 - Transformer will be supplied with bolt, lock washer and flat washer.

* Calculated value	V=VAC rms A=l rms	C/T= Center Tap	N/L= No load	
 plitron TOROIDAL POWER PRODUCTS engineered to perform like no others Plitron Manufacturing Inc. Toronto, Canada M3J 3J2 www.plitron.com	This document is the property of Plitron Manufacturing Inc. It is not to be copied or transmitted or used as the basis for manufacturing of apparatus without written permission. Copyright Plitron Manufacturing Inc.		TOROIDAL POWER TRANSFORMER	
	DESIGN BY:	E.TAM	DATE:	03/14/2007
	DRAWN BY:	R.C.	DATE:	03/17/2008
	CHECKED BY:		DATE:	
	APPROVED BY:		DATE:	
		DWG NO.	654708-03	
		SCALE	N/A SHEET 1 OF 1	